





Specification :

Light source brand : Osram / Samsung / Lumileds
 Housing : Die Casting Aluminum + PC
 Diameter Pole : Ø 76 mm
 Ingress Protection : IP 66


Dimension

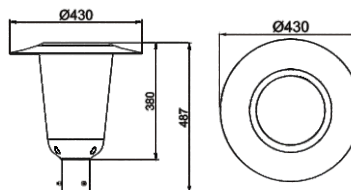


Light Distribution



3030 Light Source



5050 Light Source



Equipment

Type	Lamp Wattage	4000K Ra70@Tq=25 C		3000K Ra70@Tq=25 C	
		Light Output (lm)	Efficacy (lm/W)	Light Output (lm)	Efficacy (lm/W)
3030 Light Source	15	1650	110	1540	103
	25	2750	110	2567	103
	35	3850	110	3593	103
	45	4950	110	4620	103
	60	6600	110	6160	103
	80	8800	110	8213	103

Type	Lamp Wattage	4000K Ra70@Tq=25 C		3000K Ra70@Tq=25 C	
		Light Output (lm)	Efficacy (lm/W)	Light Output (lm)	Efficacy (lm/W)
5050 Light Source	25	3375	135	3125	125
	35	4725	135	4375	125
	45	6075	135	5625	125
	60	8100	135	7500	125
	80	10800	135	10000	125