





### Specification :

- Light source brand : Osram / Samsung / Philips
- Housing : Die Casting Aluminum + Glass
- Diameter Pole : Ø 76 mm
- Ingress Protection : IP 66

### Dimension

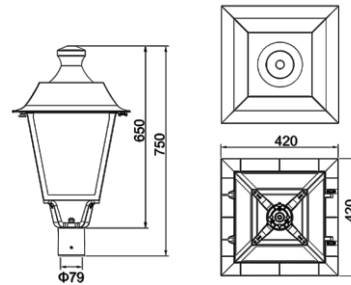


### Light Distribution

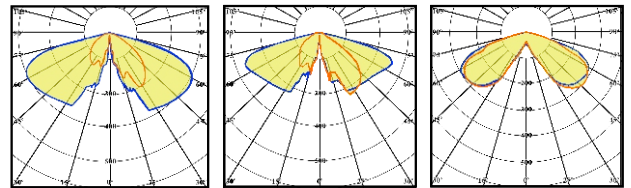

3030 Light Source

5050 Light Source

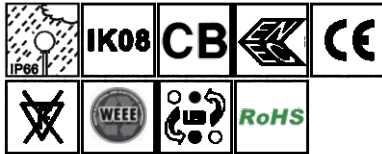

### Equipment

Type	Lamp Wattage	4000K Ra70@Tq=25 C		3000K Ra70@Tq=25 C	
		Light Output (lm)	Efficacy (lm/W)	Light Output (lm)	Efficacy (lm/W)
3030 Light Source	20	2500	125	2340	117
	30	3750	125	3510	117
	40	5000	125	4680	117
	50	6250	125	5850	117
	60	7500	125	7020	117
	70	8750	125	8190	117
	80	10000	125	9360	117

Type	Lamp Wattage	4000K Ra70@Tq=25 C		3000K Ra70@Tq=25 C	
		Light Output (lm)	Efficacy (lm/W)	Light Output (lm)	Efficacy (lm/W)
5050 Light Source	20	2700	135	2500	125
	30	4050	135	3750	125
	40	5400	135	5000	125
	50	6750	135	6250	125
	60	8100	135	7500	125
	70	9450	135	8750	125
	80	10800	135	10000	125