



L10150
(can adjustable)




L10155



L10156

Light Distribution

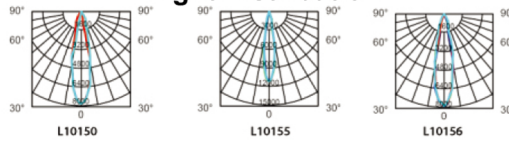

Product Specification

- Type : L10150 , L10155 , L10156
- Lamp : Fortimo SLM C PW 1208 I L15 2024 G6
Kit Basic core 3000 G1 (COB)
- Beam Angel : 24° / 36°
- Material : Die Cast Aluminium
- Finishing Procces : Powder Coating
- Colour : Sand White
- Ingress Protection : IP 20

Dimension (mm)



Type	D	H	Cut Hole
L 10150	155	105	143
L 10155	155	161	143
L 10156	155	131.5	143

Equipment

Lamp	Light Output	Lamp Wattage	Module efficacy	Replaced Wattage	Color Temp	CRI	Lfe Time	TCASE	Driver
	lm	W	lm/W	W	K	Ra	hrs	°C	
Fortimo SLM C PW 1208 I L15 2024 G6	3000	27.5	117	50	3000, 3500, 4000	80, 90	50.000	85	Xitanium 32W 0.7/0.75A 42V I 230V CertaDrive 30W 0.7A 42V 230V Element LD 30/220-240 700
Kit Basic core 3000 G1	3000	28	107	50	3000, 4000	80, 90	30.000	70	