

**IP 66**


Ready to  
**smart system**



## Product Specification

Type	: SKSTF-16
Module LED	: SAKA LM G1 NC 2X6 , SKGL LM HE C 3X8
Driver	: Meanwell , Moso , Philips
Voltage	: 220 - 240 V
Life Time	: 50.000 hours
SPD	: 10 kV
Housing	: Die-Cast Aluminium
Ingress Protection	: IP 66


## Beam Angle

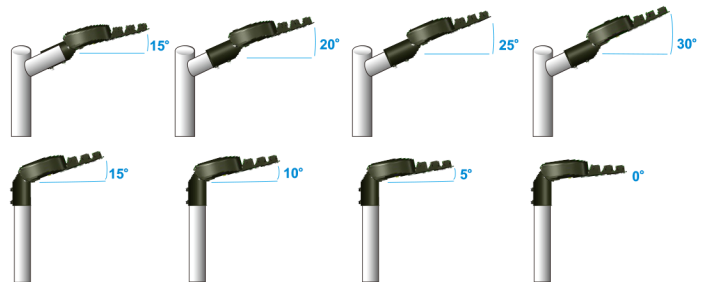


## Accessories

- Lens : - LEDIL STRADA IP 2x6 T2-B
- LEDIL STRADA IP 24 3x8 T2


## Dimension (mm)

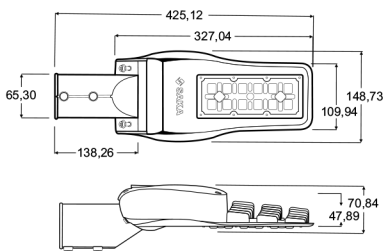

## Light Distribution Curve

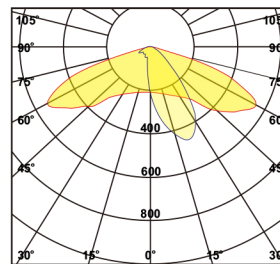

LEDIL STRADA IP 2x6 T2-B

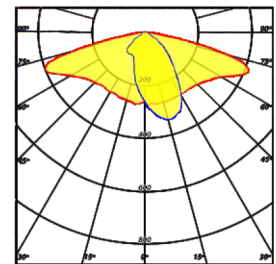

LEDIL STRADA IP 24 3x8 T2

## Equipment

Modul	Watt	lm	lm/W	Modul	Watt	lm	lm/W	CCT
SAKA LM G1 NC 2X6	10	1.480	148	SKGL LM HE C 3X8	10	1.630	163	3.000 / 4.000 / 5.000 K
	15	2.145	143		15	2.415	161	3.000 / 4.000 / 5.000 K
	20	2.760	138		20	3.180	159	3.000 / 4.000 / 5.000 K
	25	3.350	134		25	3.900	156	3.000 / 4.000 / 5.000 K
	30	3.930	131		30	4.620	154	3.000 / 4.000 / 5.000 K
	35	4.445	127		35	5.320	152	3.000 / 4.000 / 5.000 K
	40	4.960	124		40	5.960	149	3.000 / 4.000 / 5.000 K
	45	5.445	121		45	6.615	147	3.000 / 4.000 / 5.000 K
	50	5.900	118		50	7.250	145	3.000 / 4.000 / 5.000 K
	55	6.325	115		55	7.865	143	3.000 / 4.000 / 5.000 K
60	6.780	113	60	8.450	141	3.000 / 4.000 / 5.000 K		