

**IP 66**


Ready to  
**smart system**



## Product Specification

Type	: SKSTF-16 ( 2 Module )
Module LED	: SAKA LM G1 NC 2X6 , SKGL LM HE C 3X8
Driver	: Philips , Moso , Meanwell
Voltage	: 220 - 240 V
Life Time	: 50.000 hours
SPD	: 10 kV
Housing	: Die-Cast Aluminium
Ingress Protection	: IP 66

## Dimension (mm)

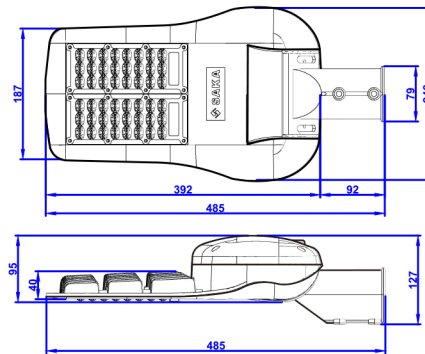

## Accessories


Lens	: - LEDIL STRADA IP 2x6 T2-B - LEDIL STRADA IP 24 3x8 T2
------	---

## Equipment


Modul	Watt	lm	lm/W	CCT
SAKA LM G1 NC 2X6 (2 Module)	70	10.150	145	3.000 / 4.000 / 5.000 K
	75	10.725	143	3.000 / 4.000 / 5.000 K
	80	11.360	142	3.000 / 4.000 / 5.000 K
	85	11.900	140	3.000 / 4.000 / 5.000 K
	90	12.420	138	3.000 / 4.000 / 5.000 K
	95	12.920	136	3.000 / 4.000 / 5.000 K
	100	13.600	136	3.000 / 4.000 / 5.000 K
	105	14.070	134	3.000 / 4.000 / 5.000 K
	110	14.630	133	3.000 / 4.000 / 5.000 K
	115	15.065	131	3.000 / 4.000 / 5.000 K
	120	15.600	130	3.000 / 4.000 / 5.000 K

Modul	Watt	lm	lm/W	CCT
SKGL LM HE C 3X8 (2 Module)	70	10.850	155	3.000 / 4.000 / 5.000 K
	75	11.475	153	3.000 / 4.000 / 5.000 K
	80	12.160	152	3.000 / 4.000 / 5.000 K
	85	12.835	151	3.000 / 4.000 / 5.000 K
	90	13.500	150	3.000 / 4.000 / 5.000 K
	95	14.155	149	3.000 / 4.000 / 5.000 K
	100	14.900	149	3.000 / 4.000 / 5.000 K
	105	15.540	148	3.000 / 4.000 / 5.000 K
	110	16.170	147	3.000 / 4.000 / 5.000 K
	115	16.790	146	3.000 / 4.000 / 5.000 K
	120	17.400	145	3.000 / 4.000 / 5.000 K

## Light Distribution Curve



LEDIL STRADA IP 2x6 T2-B



LEDIL STRADA IP 24 3x8 T2